



LED LANDSCAPE(LS02)

Applications:

Facade, Wall Washing, Landscape lighting, Poster board lighting, Building lighting.

FEATURES

- Rugged aluminum housing with UV resistant powder coat finish offers outstanding corrosion protection.
- Delivers up to 230lm-650 lm while power consumption are 6W and 10W.
- Beam angle: 25/40/60 for option.
- Long life LEDs lasting up to 50,000hours
- IP66 rated and suitable for use in ambients from -20 °C to 40 °C (-4 °F - 104 °F) .



LED Short cowl

LED Long cowl



PERFORMANCE DATA

SYSTEM WATTS	COWL	BEAM ANGLE	VOLTAGE	2700K(80CRI)	3000K(80CRI)
				LUMENS (lm)	LUMENS (lm)
6W	NON cowl	° 5 2	C A V	4 2 - 2 01 0 5	0 0 5
		° 0 4	C A V	4 2 - 2 01 0 5	0 0 5
		° 0 6	C A V	4 2 - 2 01 2 4	0 2 4
6W	Short cowl	° 5 2	C A V	4 2 - 2 01 8 4	0 8 4
		° 0 4	C A V	4 2 - 2 01 5 4	0 5 4
		° 0 6	C A V	4 2 - 2 01 3 3	0 3 3
6W	Long cowl	° 5 2	C A V	4 2 - 2 01 5 3	0 5 3
		° 0 4	C A V	4 2 - 2 01 3 3	0 3 3
		° 0 6	C A V	4 2 - 2 01 3 2	0 3 2
10W	NON cowl	° 5 2	C A V	4 2 - 2 01 5 6	0 5 6
		° 0 4	C A V	4 2 - 2 01 5 6	0 5 6
		° 0 6	C A V	4 2 - 2 01 3 5	0 3 5
10W	Short cowl	° 5 2	C A V	4 2 - 2 01 0 6	0 0 6
		° 0 4	C A V	4 2 - 2 01 6 5	0 6 5
		° 0 6	C A V	4 2 - 2 01 2 4	0 2 4
10W	Long cowl	° 5 2	C A V	4 2 - 2 01 4 4	0 4 4
		° 0 4	C A V	4 2 - 2 01 0 4	0 0 4
		° 0 6	C A V	4 2 - 2 01 0 3	0 0 3



ELECTRICAL DATA

Number Of Drivers	Driver Current (mA)	Nominal Power (W)	INPUT VOLTAGE (V)	CURRENT (Amps)
1	0 4 1	6	2 1	0 5 . 0
		6	4 2	5 2 . 0
1	0 3 2	0 1	2 1	3 8 . 0
		0 1	4 2	2 4 . 0

DIMENSIONS



unit: mm/inch

LED Long cowl

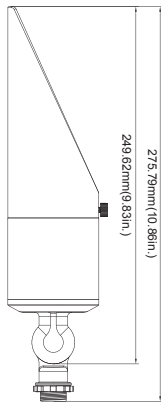


Weight: 1.24lb

LED Short cowl

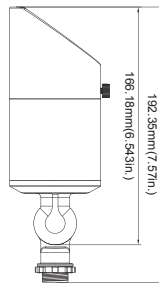

Weight: 1.09lb

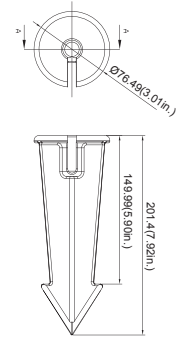


ORDERING GUIDE

Example: AO-6-LV-XXK-Y-Y

Fixture Type	Wattage	Voltage	CCT	Finish	Beam Angle
AO- <input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>
LS02 Landscape Series	6 6W 10 10W	LV 12-24V	27K 2700K 30K 3000K 40K 4000K 50K 5000K	D Dark Bronze B Black W White	25 25 Degree 40 40 Degree 60 60 Degree

CHOOSE YOUR OPTICAL DISTRIBUTION

Each optic is designed for a specific purpose

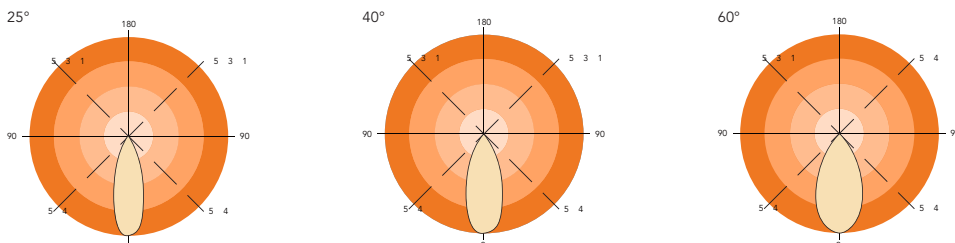

Accessories Options

