



# BOLLARD LIGHT(BL01)

## Applications:

Suitable for building entryways, walking paths and pedestrian plazas, as well as any other location requiring a low-mounting-height light source.

## FEATURES

- Efficacy higher than 115 lm/W with zero uplight while consumes 26W.
- Round appearance for good decorative effect, sized in 3.5ft height.
- Dark bronze polyester powder-coat finish.
- 360 degrees surround illumination with 80 CRI.
- 1-10V dimming and projected over 50,000 hrs life span.
- Operating temperature is -40°C to 40°C (-40°F to 113°F).
- Optional emergency function for emergency needs.
- Robust ground cage pre-buried installation.
- UL/cUL wet location listed.



## PERFORMANCE DATA


SYSTEM WATTS	VOLTAGE	4000K(80CRI)		5000K(80CRI)	
		LUMENS	LPW	LUMENS	LPW
26W	120-277V	3000lm	115 lm/W	3100lm	119 lm/W

## ELECTRICAL DATA

Number Of Drivers	Driver Current (mA)	Nominal Power (W)	INPUT VOLTAGE (V)	CURRENT (Amps)
1	670	26	120	0.22
		26	208	0.13
		26	240	0.11
		26	277	0.09

## DIMENSION

unit: inch/mm

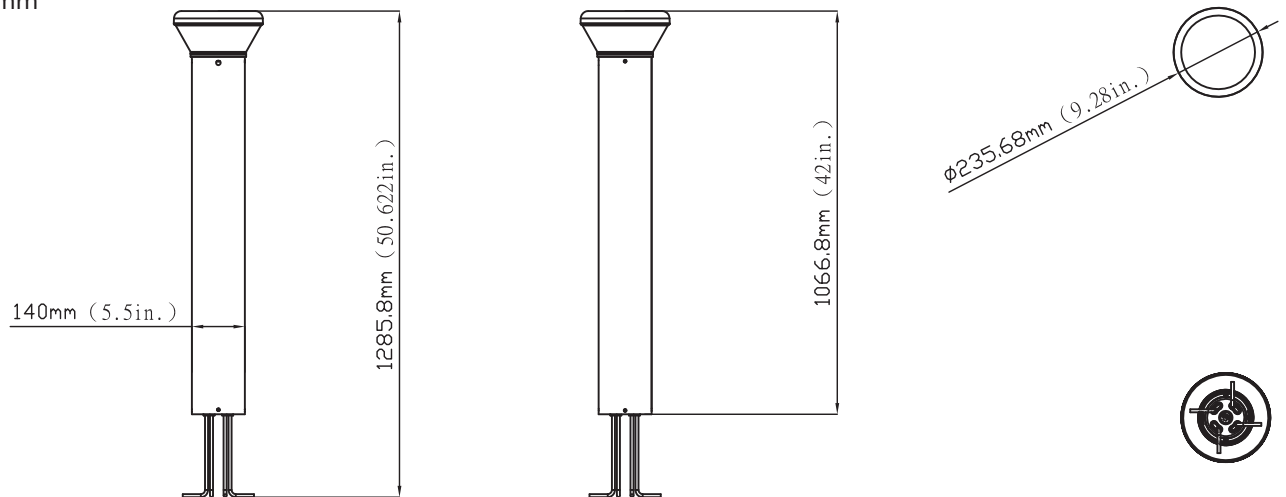

## ORDERING GUIDE

Example: AO-BL01-26-LV-XXK-Y-Y-Y

Fixture Type	Wattage	Voltage	CCT	Finish	Backup Battery (Option)	Internal Code
AO- <input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>
<b>BL01</b> Bollard Light Series	<b>26</b> 26W	<b>LV</b> 120-277V	<b>40K</b> 4000K <b>50K</b> 5000K	<b>D</b> Dark Bronze <b>B</b> Black <b>W</b> White	<b>B</b> With Emergency Battery <b>Blank</b> Without Emergency Battery	<b>Blank</b> <b>Alphanumeric</b>