



LED HIGH BAY (HB09)

Applications:

Suitable for commercial, retail and institutional applications including gymnasiums, covered outdoor areas and garden centers.

FEATURES

- The HB09 is an economic product that is suitable for any architectural or commercial application
- Die-cast aluminum heat sink with corrosion resistant powder coating that adapts well to architectural environments
- Offering wattages from 60W-155W, while standard efficacy is up to 112 lm/W
- Lumens range from 6300 to 17,400 lumens
- Offers conduit pendant, hook and U-bracket mounting options
- Anti-UV prismatic translucent lens is designed to enhance light uniformity and reduce glare
- Operating input voltage: 120VAC or 230/240VAC
- PF > 90%, THD <20%
- Ambient Operating Temperature -40C to 40°C (-40F to 104°F)
- IP65 Rated for wet locations
- UL Certified
- Standard 3-Year Warranty



60W/80W




100W/120W



155W



PHOTOMETRICS

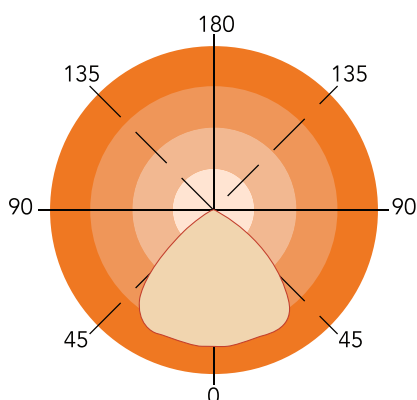

ACCESSORIES (Optional)






U-Bracket
Use for surface mount

PERFORMANCE DATA

| SYSTEM WATTS | PHOTOMETRY | 3000K (80CRI) | | 4000K (80CRI) | | 5000K (80CRI) | |
|--------------|------------|---------------|----------|---------------|----------|---------------|----------|
| | | LUMENS | LPW | LUMENS | LPW | LUMENS | LPW |
| 60W | High Bay | 6300lm | 105 lm/W | 6400lm | 107 lm/W | 6400lm | 107 lm/W |
| 80W | High Bay | 8400lm | 105 lm/W | 8500lm | 106 lm/W | 8500lm | 106 lm/W |
| 100W | High Bay | 10500lm | 105 lm/W | 11000lm | 110 lm/W | 11000lm | 110 lm/W |
| 120W | High Bay | 12600lm | 105 lm/W | 13000lm | 108 lm/W | 13000lm | 108 lm/W |
| 155W | High Bay | 16300lm | 105 lm/W | 17400lm | 112 lm/W | 17400lm | 112 lm/W |

DIMENSIONS

unit: inch/mm

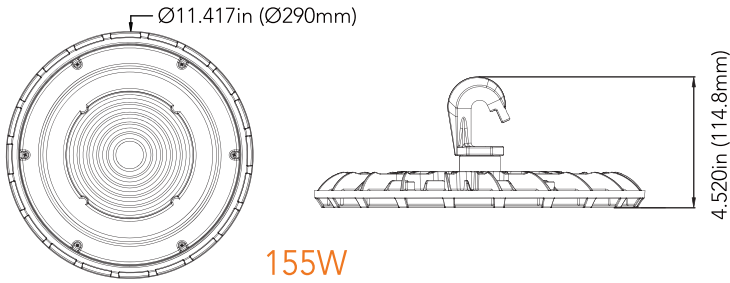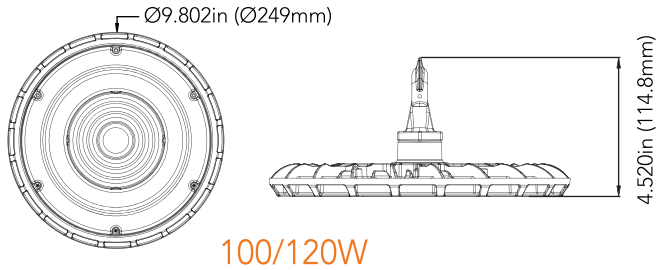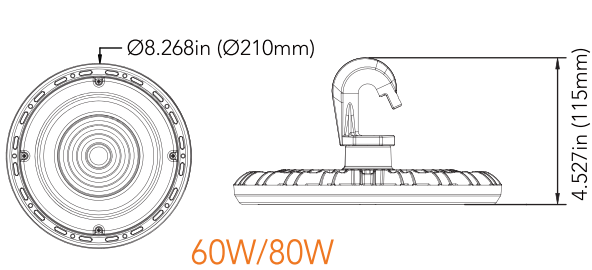

MOUNTING



ORDERING GUIDE

Example: AO-HB09-60-LV-30K-B-ML

| Fixture Type | Wattage | Voltage | CCT | Finish | Lens | Mounting (Option) | Internal Code |
|--------------------------------|---|--|--|--|-----------------------|---|-------------------------------------|
| AO- <input type="text"/> | <input type="text"/> | <input type="text"/> | <input type="text"/> | <input type="text"/> | <input type="text"/> | <input type="text"/> | <input type="text"/> |
| HB09 High Bay Series | 60 60W 80 80W 100 100W 120 120W 155 155W | LV 120V LV1 230V/240V | 30K 3000K 40K 4000K 50K 5000K | B Black D Dark Bronze W White | ML Medium Lens | Blank Without Hook Mount TR Trunnion Mount | Blank Alphanumeric |



Alpha Omega Lighting
www.alphaomegalighting.com

347 N. Church Street • Ripley, WV 25271
 Phone: 304-786-4055 • Email: info@alphaomegalighting.com

Specifications are subject to change without notice.
 Updated 7-13-2023